

ASTR®

Refrigeration Technology

ASTR Refrigeration Technology has designed something that will make installation easier with "The Compact Range"



The Compact Range

Features & Benefits:

- **Hermatique Tecumseh Compressor**
- **Fan Speed Control**
- **Passivated Fins**
- **D/P Control**
- **Drier, Sight Glass**
- **Suits Standard A/C Bracket**
- **Cuts Labour Costs**
- **Compact Design**

MODEL	COMPRESSOR MODEL NUMBER	AMBIENT TEMP.C'	R404A SATURATED SUCTION TEMPERATURE:'C					
			-15	-10	-5	0	7.2	10
AU100TM	CAJ4517Z	32	1840	2246	2716	3220	3970	4250
		38	1574	2053	2522	2958	3710	4105
AU150TM	CAJ4519Z	32	2152	2851	3529	4198	5190	5322
		38	1980	2645	3383	3986	4921	5321
AU200TM	FH4524Z	32	2510	3179	3870	4596	5924	6180
		36	2295	2931	3647	4393	5670	5911
Low Temperature		AMBIENT TEMP.C'	-30	-23.3	-20	-15	-10	
AU200TL	FH2480Z	32	1760	2395	2705	3195	3615	
		38	1620	2190	2510	2952	3513	

ASTR®


Refrigeration Technology

The company reserves the right to make specification changes without notice.

ASTR[®]

Refrigeration Technology

The Compact Range

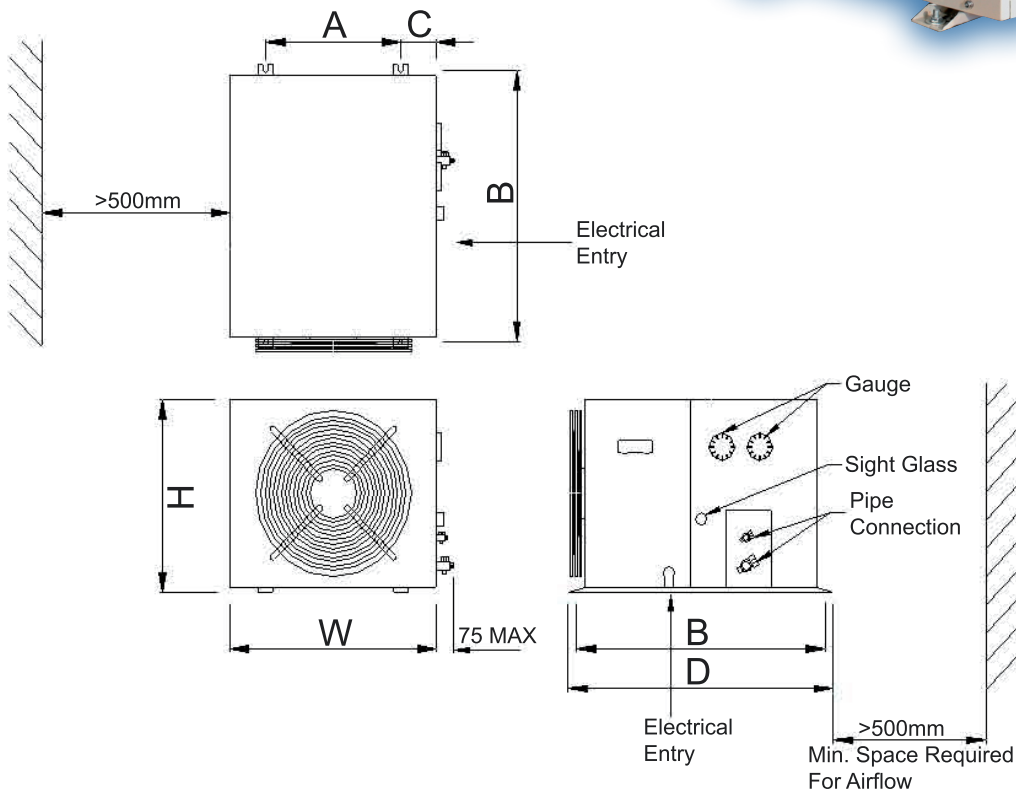

MODEL	DIMENSIONS			
	OVERALL	MOUNTING HOLES		DIMENSIONS TO CONNECTION
	H (Height) x W (Width) x D (depth)	A	B	
	mm	mm	mm	
AU100TM	H = 435 x W = 678 x D = 504	328	638	85
AU150TM	H = 435 x W = 728 x D = 554	348	688	100
AU200TM	H = 435 x W = 728 x D = 554	348	688	100
AU200TL	H = 435 x W = 728 x D = 554	348	688	100